

•• kami XS




- 10k HD Sound
- Adaptive Sound Zoom
- Sound Zoom
- Adaptive Noise Guard
- Expansion (Squelch)
- Wind Shield
- Adaptive Feedback Guard
- Feedback Check
- 12 WDRC-Channels
- Multi Channel MPO
- Up to 4 Programs
- Switch (programmable)
- Low Battery Indicator
- Start-up Delay
- Battery Compartment Lock
- Auto T-Coil/Auto Phone
- T-Coil
- Tinnitus-Module
- Data Logging
- Live View
- MySound!
- Water repellent coating
- Option: Easy Thin Tube System

Technical Data

	EN 60118-7:2005 (2 cm ³ -coupler)	EN 60118-0/A1:1994 (Ear Simulator)	ANSI S3.22-2009 (2 cm ³ -coupler)
Operating Voltage	1.30 V	1.30 V	1.30 V
Acoustic Gain (50 dB SPL)			
HFA	52 dB	–	52 dB
1600 Hz	–	66 dB	–
Peak Value	61 dB	66 dB	61 dB
Max. Output (90 dB SPL)			
HFA	119 dB SPL	–	119 dB SPL
1600 Hz	–	132 dB SPL	–
Peak Value	127 dB SPL	132 dB SPL	127 dB SPL
Reference Test Gain	42 dB	56 dB	42 dB
Induction Coil Sensitivity	80 dB SPL	93 dB SPL	104 dB SPL
Frequency Range	100 Hz–9800 Hz	100 Hz–6000 Hz	100 Hz–9800 Hz
Total Harmonic Distortions			
500/800/1600 Hz	3/1/1 %	3/2/2 %	3/1/1 %
Equivalent Input Noise	23 dB	18 dB	23 dB
Battery Current	1.24 mA	1.19 mA	1.24 mA
Battery Type	10	10	10
Average Battery Life (Zinc-Air)	60 h	60 h	60 h
Tinnitusmasker[®]			
Noise Level (RMS)	111	119	111
Frequency Range	200 Hz–5000 Hz	400 Hz–8000 Hz	200 Hz–5000 Hz

* Only when Tinnitus-Module is activated in audifit.

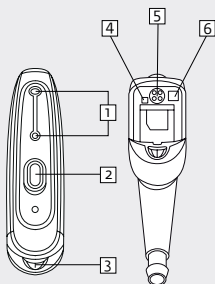

- 1 Dual Microphone system
- 2 Rocker switch
- 3 Cover flap for audio contacts
- 4 Battery compartment/On-Off-switch
- 5 Battery compartment lock
- 6 Side marking red/blue

Standard




Programming

Cable: Cable set H or I
 Battery: without Battery
 Progr.-Box: HI-PRO/HI-PRO II
 HI-PRO USB
 NOAHlink
 Software: audifit 5.5




●● kami XS

Fitting Range

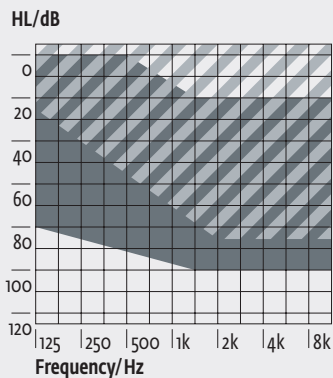

The shaded area applies to the kami XS with Easy Thin Tube Option.


Third Octave Band Noise*

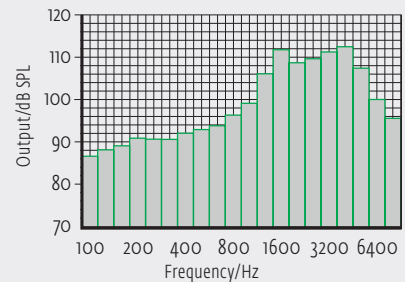


* All curves are measured with 2cm³-coupler (EN 60318-4:2010). Only when Tinnitus-Module is activated in audifit.

These curves are measured with Ear Simulator (EN 60318-4:2010) in reference setting.


Maximum Output

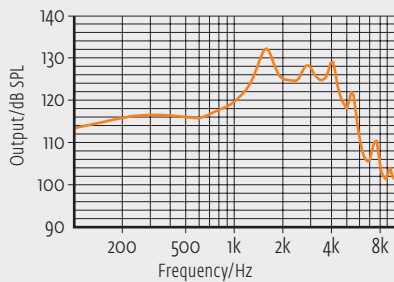

Acoustic Gain

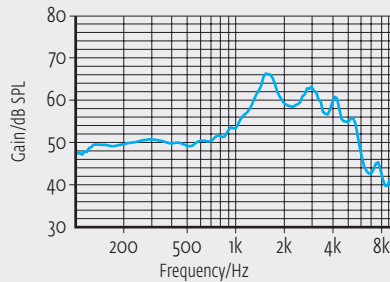


Frequency Response (RTG)

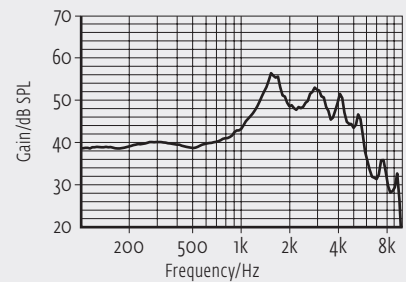


All curves are measured with 2cm³-coupler (EN 60318-5:2006) in reference setting.


Maximum Output

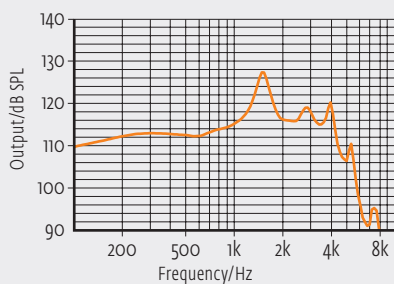


Acoustic Gain

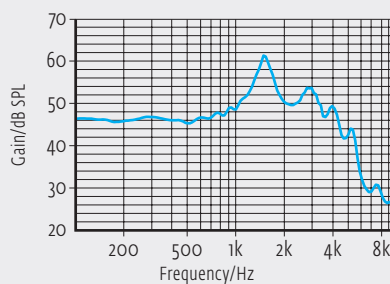

Frequency Response (RTG)

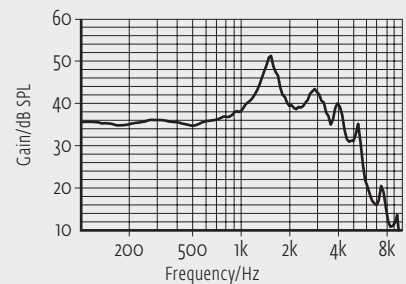

Induction Coil Sensitivity

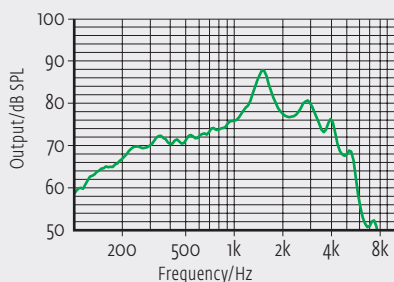

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.